



**TRI-CITY MOTOR
SPEEDWAY**

2024 Pro Stock Rules

Track Owner

Mike Blackmer 616-291-4781

Lead Technical Official

Joe Fowler 989-865-6855

Pro Stocks

The rules and/or regulations set forth herein are designed to provide for the orderly conduct of racing events and to establish minimum acceptable requirements for such events. These rules shall govern the condition of all events, and by participating in these events, all participants are deemed to have complied with these rules. NO EXPRESSED OR IMPLIED WARRANTY OF SAFETY SHALL RESULT FROM PUBLICATIONS OF OR COMPLIANCE WITH THESE RULES AND/OR REGULATIONS. They are intended as a guide for the conduct of the sport and are in no way a guarantee against injury or death to a participant, spectator or official.

The race director shall be empowered to permit reasonable and appropriate deviation from any of the specifications herein or impose any further restrictions that in his opinion do not alter the minimum acceptable requirements. NO EXPRESSED OR IMPLIED WARRANTY OF SAFETY SHALL RESULT FROM SUCH ALTERATION OF SPECIFICATIONS. Any interpretation or deviation of these rules is left to the discretion of the officials. Their decision is final.

1. SAFETY EQUIPMENT

Rules apply at all times car is on track. An operational 2-½ pound minimum fire extinguisher with gauge visible for inspection purpose is mandatory in each racecar and tow vehicles. Extinguisher must be mounted in a quick release bracket. DUCT TAPE AND/OR ZIP TIES ARE NOT AN ACCEPTABLE MOUNTING DEVICE.

Rules apply at all times car is on track. Snell-rated SA2010 or SA2015 helmet required. Roll bar padding required in driver compartment. *Recommended: Fire retardant padding.* SFI-approved full fire suit required. Fire retardant gloves, shoes and neck brace (or head and neck restraint) required. **Competitors under the age 18 are recommended to use an SFI 38.1 head and neck restraint system due to the young body and developing bones.** Right and left seat head supports required if using head and neck restraint system. *Recommended: Fire retardant head sock and underwear, collapsible steering shaft.* Driver-side window net required, minimum 16 inch by 20 inch ribbon or mesh style, and must be mounted to roll cage so latch is at top front of window. Minimum three inch (two inch with head restraint system) wide SFI-approved five point safety belt assembly required, must be mounted securely to main roll cage. *Recommended: Safety belts no more than two years old.* Any safety equipment physically or visibly wore or damaged must be replaced, regardless of age. All safety equipment must not be altered and must follow manufacturers use, specifications and requirements for installation.

2. APPEARANCE

3. BATTERY / STARTER

Battery 12V or 16V may be located anywhere outside the driver's compartment. It must arrive at the track fully charged. The battery must be securely mounted with positive fasteners and brackets. The battery terminals must be insulated or enclosed with a non-conductive material that will prevent contact with any part of the race car should the battery become dislodged from the battery mount. Starters must be in working order. All cars must start under their own power in the staging area or the will report to the rear of the event.

A clearly labeled Battery ON/OFF 'KILL' switch must be to the right of the driver and within drivers reach. This is for the Safety Crew to be able to kill power to everything

4. GLASS


A minimum of three windshield bars in front of driver are required. **NO MIRRORS ALLOWED.**

5. HOODS

Hoods must be securely fastened, subject to track inspection. An air cleaner and fire arrestor are mandatory.

6. BODY

No steel bodies. All fenders, doors, and quarter panels must be aluminum or plastic. No reinforcing of aluminum body panels by layering another fender or door underneath. See Diagram below.

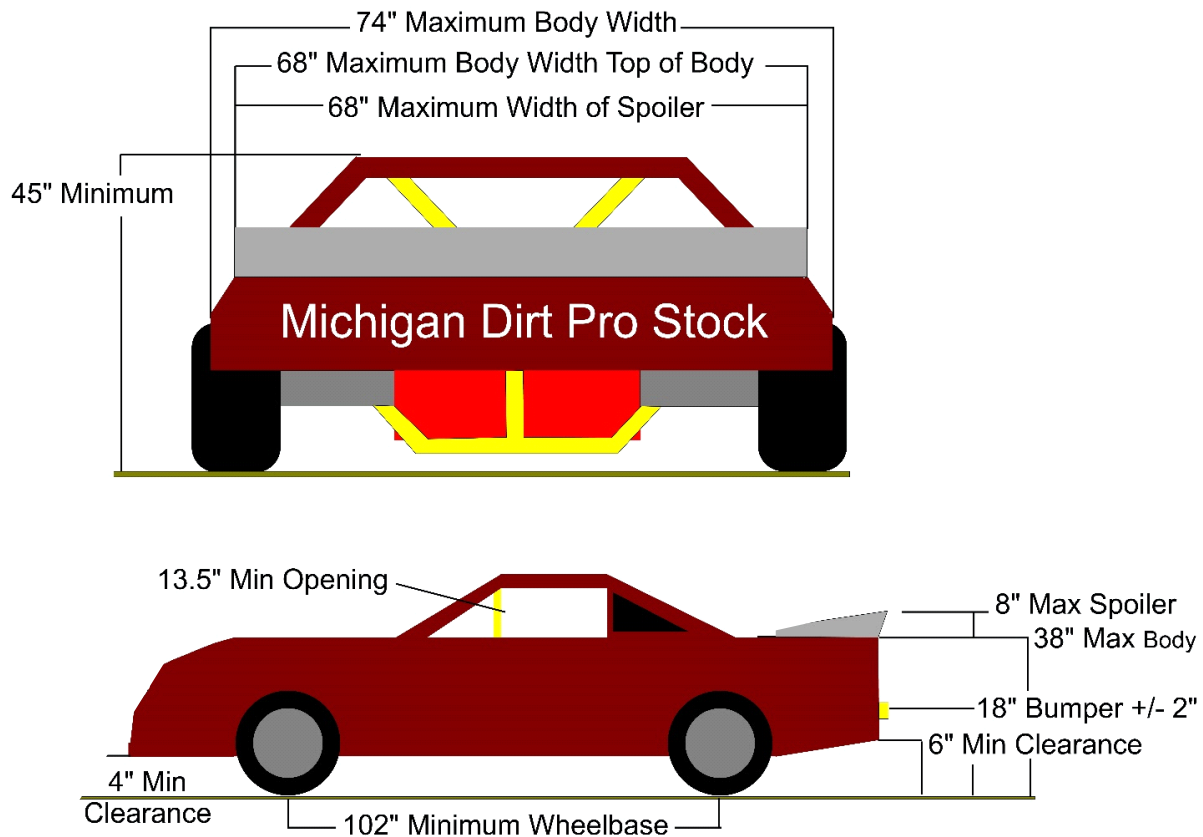

- Nose piece rules relaxed for the 2022 racing season in effort to increase creativity and interest in the class
- Nose - Maximum 46.5" from center of front hub
- Maximum nose and fender flare width 82". Must be able to see the tires by looking down the side of the car or really close to seeing the front tires.
- After market bodies are allowed.
- Once piece body only
- Spoilers' max width is 68". Spoilers' max height is 8". 8" total material, including top lip.
- Spoiler braces Maximum: 18" long, 4.5" tall in front and 8" tall in rear.
- No side windows or air deflectors allowed.
- Opera windows, both open or both solid
- Maximum overall body width is 74". Max body width at top (Deck and Interior) is 68".
- All body sides from nose to tail on cars will have a visible bow outward and MUST have a break in bodyline.
- Minimum roof height – 45", maximum deck height – 38".
- All roofs must be stock appearing and from 41" - 45" long front-to-rear and 48" - 54" wide side-to-side.
- No partial roofs, no tilted roofs, no dished-out roofs.
- No wings attached to roof or to side posts.
- No built-in fiberglass air dams.

- All roof posts must meet outside of car.
- Front roof supports to be 2"x24".
- Side vents on front roof post can extend back no further than 16" bottom, then straight up to roof for an L-configuration. Side vents must meet outside of car.
- Rear roof post supports must meet outside of car on a flat straight line and be stock appearing. Top length max 24". Bottom length is 36" maximum. Rear sail panels must both be solid or open, not one of each. Sail panel and spoiler support cannot connect, must be a gap.
- Front & Rear bumpers not to be wider than body, but must fill area inside panels, tolerance, 2" each side.
- All Pro Stock cars MUST have a rear panel 8" minimum down from deck lid, complete side to side, at 90-degree angle. Must be solid. May have up to a 6" fuel filler door.
- Rear bumper cannot extend more than 8" behind body.
- Bumper heights must be 18" + or - 2" from ground.
- All structural tubing must remain inside body.
- Driver must be able to exit from both sides of car with helmet on.
- Interior of car must be 13 ½" below roll cage minimum and all area of roof, from front window to behind driver's seat. No area of the interior of cockpit can be less than 13 ½" below the roof and roll cage for safety. Easy exiting of car from either side. Windows must have 13 ½" of clearance straight up and down. No support bars blocking right exit from cockpit allowed.

7. ENGINE

Stock American engine. No LS Engines, No cubic inch limit. The forward most spark plug hole may not be set back any further than a perpendicular line with the center of the upper ball joints for each manufacturer. Roller tip and full roller rockers allowed. **No roller camshafts.** NO ALUMINUM HEADS OR BLOCKS. NO EXTERNAL OIL PUMPS.

8. EXHAUST

Mufflers are MANDATORY .100-DECIBEL LIMIT. MUST BE AT THE END OF EXHAUST, must be unaltered muffler, may be added to your current system. NO turndowns. Mufflers must be welded securely in place. Loss of muffler may result in disqualification. Exhaust may not exit through body panels or door.

Headers are allowed. Headers may go over the top of transmission. No 180-degree headers, No Iron Lung Headers and No Tri-Y Headers.

9. IGNITION

Distributor must be stock appearing and accept stock distributor cap. No aftermarket dual point ignition or magnetos allowed. No crank fire ignitions. No adjustable ignition control devices. No timing retard controls, or digital gauges (including tach). No electronic monitoring computer devices capable of storing or transmitting information except analog tach. Only stock manufacturer bolt on type parts allowed. Example: MSD or Accel replacement coils or modules allowed providing it fits in stock location. You are allowed ONE Unaltered 12 Volt Ignition System. Ignition must be out of reach of driver and be accessible for tech inspection all ignition wires must be visible for inspection. One box, One Coil, and One Single Point Distributor. Only Ignition Boxes Allowed Are: MSD 6A p/n 6401, MSD 6ALN p/n 6430, Crane HI-6N Oval track Ignition, p/n 6000-6410, Accel 300+ Ignition w/rev limiter p/n 49300. MSD E-Curve Distributor is not allowed. HEI distributor is allowed. No electronic traction control devices.

10. CARBURETOR

ONLY 1 Holly #4412--2 bbl (500 not 750) carburetor will be allowed. Holley - part no. 0-4412, may be modified to Holley HP Dorton part no. 0-80583-1 specs only. Choke horn cannot be removed. Must pass inspection with gauges. Altered carburetors will be CONFISCATED! No transverse mount carburetors allowed. Carburetor must be mounted in conventional manner with float bowl facing forward. Carburetor adapter/spacer allowed, maximum thickness (between carburetor and intake) including gaskets is 1.20 inches. **No billet metering blocks allowed.**

Edelbrock intakes 2901 or 2912: Carb spacers are not allowed. A maximum gasket of .10 inches is allowed.

Top 10 may have to pull carburetor after every feature. Inspection Gauges will be used.

11. INTAKE

Must have 1 inch minimum inspection hole in intake or pull distributor to view camshaft and lifters.

Cast iron OEM intakes will be permitted. Must have identification numbers visible.

Only the following aftermarket intakes are allowed:

Weiland: X-Celerator Chevy 7547-1, Ford 7515, 7516, Chrysler 7545 **Edelbrock: Torker / Torker II** Chevy 5001, 5061, Ford 5021, 5081, 2760, Chrysler 5076 **Edelbrock: Performer** Chevy 2101, 2116, Ford 2121, 2181, Chrysler 2176

Professional Products: Cyclone Chevy 52001, 52007

Edelbrock: Victor / Victor Jr. Chevy: 2901, 2912, 2972, 2975, 2977; Ford: 2921, 2980, 2981

No welding or modifying of Victor / Victor Jr will be allowed, exception is ½" of port matching will be allowed.

12. FUEL

Racing fuel and e85 is allowed. No alcohol, no methanol, no E98. No performance enhancing or scented additives. Fuel must pass both dielectric and chemical tests. A fuel shut off valve is required on each car. "Fuel Shut Off" securely mounted and easily accessible. The track Inspector has final decision on mounting of shut off valve.

See below page for fuel shut off options:

If running a ball valve: A fuel shut off ball valve is required to be within reach of driver and safety crew and to be mounted with the handle through the deck or firewall not to be mounted inside the cockpit. The valve and handle must be painted bright orange, and clearly labeled with "Fuel Shut Off" securely mounted and easily accessible.

If running an Oberg Valve: An Oberg Fuel Line Safety Valve is required to be installed under body/deck and behind firewalls, in the fuel line and per manufacture instructions; not to be mounted inside the cockpit. The valve must be securely mounted and easily accessible for inspection. Car must be clearly labeled with "Oberg Fuel Valve" composed of a vinyl sticker (1" stroke orange letters with a white 1/2" outline) sticker must contrast from body and graphics to be easily readable. Two stickers will be required; one on the deck where the ball valve would have been mounted and one on the fuel cell or on the trunk lid.

13. FUEL PUMP

Mechanical OEM type push rod fuel pumps only. No electric or belt driven fuel pumps allowed.

14. FUEL CELLS

Fuel cells are mandatory. Tank construction, location and mounting are subject to inspection. A leaking tank is grounds for disqualification. Must have bladder and check valve on fill pipe. Must have canister around tank. If fuel cell does not have aircraft style positive seal filler neck/cap system - a flapper, spring or ball type filler rollover valve is required. Must have approved loop behind the fuel cell, minimum eight (8) inch clearance. Gas cap MUST be secured to fuel cell by cable, chain or tie strap. **MUST HAVE ROLLOVER VALVE IN VENT TUBE OF FUELCELL.**

15. FIREWALL

The firewall at the front of the cockpit shall be a wall of protection against a fire from the engine compartment. It shall be tightly solid from top to bottom. Not allowing airflow from the engine compartment to the cockpit. Mandatory: 1/8 inch steel or ¼ inch aluminum plate must be used for drivers' floor.

16. ROLL CAGE

Must be Grand National design with upright supports. Must have halo bar. Four door bars are required in the driver's door. Cage construction should be a minimum of 1 ½" OD seamless DOM tubing (.095). Front and rear hoop must match main cage pipe size. No aluminum tubing. The driver's seat must be securely fastened at bottom and back of the roll cage, using seat manufacturers' specifications. Drivers head may not extend above roll cage with helmet on. Must have steel plate 18" x 24" x 1/8" in the driver's door, must have steel plate 6" x 12" x 1/8" behind the seat in front of the trailing arms.

17. FRAME

Any 1968 or newer rear wheel drive American made car is permitted in this class. No station wagons or four-wheel drives. All Pro Stocks will have minimum 102" wheelbase, maximum of one inch difference from right side to left side. All vehicles will be stripped completely of interior, except driver's seat which will be securely fastened to the roll cage, and will be equipped with a head rest or a high back racing seat and will be subject to local track inspection. The front sub and rear clip may be connected with MINIMUM 2"x2" square tubing or minimum 1 3/4" round tubing.

Must have stock front sub frame or replacement front sub frame.

ONLY TWO REPLACEMENT FRONT SUBS ALLOWED. Howe's part #358-8-01 & Port City # 100-2-205.

18. STEERING

Aluminum steering quickener allowed. No rack and pinion steering. Quick disconnect steering wheel required. Collapsible Steering Shaft Recommended. No Straight Shafts. Must have minimum ONE knuckle in shaft.

19. FRONT SUSPENSION

NO aluminum suspension pieces (Exception is upper A-Arm cross shaft). Rubber, nylon or steel control arm bushings only, no offset or bearing type. Welded single-hole shock mounts only. All coil springs must be over 4 1/2" in diameter. Front springs must be mounted in stock location. No sway bars. Stock type mounted; steel or aluminum cross shaft tubular upper control arms are permitted. Lower A-19.25 maximum

SUSPENSION

Bearing and Heim joint uppers are ok.

Arms must be OEM, bolt to OEM frame mounts and be no longer than 19.25 inches from center of ball joint to center of mounting bolt. Screw jacks are allowed. **NO** coil over springs. No 5th coils. No coil over eliminator.

20. REAR SUSPENSION

NO aluminum suspension pieces. No independent rear suspension. Rubber, nylon or steel control arm bushings only, no offset or bearing type. Rear coil springs must be mounted to rear axle on solid mounts. **Springs must be tethered to mount to keep from falling out (Ex: hose clamped or other steel tether).** Each rear coil spring may be mounted in front, on top or behind the axle tube as long as the measurement from the centerline of each spring and the centerline of the axle is between zero inches and five and half inches (5 1/2"). Steel coil over eliminators allowed on rear suspension only (Spring location measurement still applies). Bottom trailing arm can be no longer than 28" center of mounting bolt to center of mounting bolt and must measure within 2" right to left.

All coil springs must be over 4 1/2" in diameter. Screw jacks are allowed. All heim joints must be steel, 3/4" (minimum). **NO** coil over spring-shocks / shock-springs. **NO** torque arms or torque links. Steel or composite rear leaf spring allowed. No 5th coils. No swing arm suspension. All brackets must be welded on rear end. Only 3 type of rear suspension allowed, traditional 3 Link (2 trailing arms, traditional Leaf spring rear suspension and stock 4 link suspension.

21. HUBS & WHEELS

Eight (8) inch maximum, racing wheels and 1 inch racing / safety lug nuts required for all wheels. NO Wide 5s allowed. Bead Lock Wheel allowed on Right Rear Only, Magnetic steel wheels only, no plastic or carbon fiber wheels allowed. Maximum overall width shall not exceed 80 inches from outside of tire to outside of tire (Measured at the height of the hub / 14" off the ground).

Aluminum spacers only. OEM style only on hubs and spindles.

22. CLUTCH

No (in and out) boxes, all gears must be clutch operated (with motor running and car in still position, driver must be able to engage car in gear and move forward and backward at time of inspection).

23. TRANSMISSION

Any transmission, manual or automatic. NO quick-change transmissions. Must have scatter shield or protective plate 180 degrees around clutch. If L-plate is used, 1/8" steel plate is minimum thickness that will be allowed. Bert or Brinn type transmissions will be allowed, no ball spline. Drive Train must be disengage-able. NO direct drive systems.

24. DRIVE SHAFT

Magnetic Steel drive shaft only, must be painted white and have a steel drive shaft loop measuring 1/4" thick by 2 inches wide, located on the forward 1/3 to prevent it from dropping onto the track.

25. REAR AXLE

Any steel approved OEM passenger car or truck non-cambered rear end (housing and carrier) allowed. Safety hubs (floater) allowed. All components must be steel, exceptions are: lowering blocks, axle cap, and drive flange may be aluminum. One inch inspection hole in housing required. Full steel spool, steel mini spool or welded rear end only. Steel axles only. One piece drive flange only. No torque-dividing differentials. No Gold Tracks. No Lockers. Quick changes allowed, with steel tubes only.

26. BRAKES

Stock four wheel hydraulic brakes. All must be in working condition. Neal type brake pedal assembly permitted. Single piston, steel calipers only. Brake caliper must be unaltered. No shut off valves. No ratchet valves. No Left to Right proportioning allowed. One Front to Rear proportioning device (brake adjuster) allowed. No pinched off brake lines. All Brake lines must be visible.

27. SHOCKS

One shock absorber allowed per wheel. No air coil-over or struts allowed on the front. No Schrader or bladder type valve allowed. Steel racing shocks are allowed on the front and rear. One 90/10 shock allowed, mounted from top of rear end housing to roll cage. No bump stops. No external adjustable shocks. No bulb shocks.

28. TIRES

Hoosier M60 or American Racer P245/70D-15 on right rear required. Hoosier M30 or P245/70D-15 with MSPA stamp allowed on other three corners. You may groove, sipe and/or grind tires. Chemical alterations, vulcanizing, tire softening, defacing and/or altering the face of the tire lettering and/or tire stamping will not be permitted. Tires will be subject to a durometer test. Your tires must be harder than the baseline determined by track officials. No re-caps. Tires may be inspected at any time.

29. RADIOS

No radios, **EXCEPT MANDATORY RACECEIVERS**, allowed in car, or with any pit member or anyone connected with the racecar.

30. WEIGHT

2,800 lbs minimum. Added weight **MUST** be in plain sight, painted white. **MUST** have the car number painted on it in a contrasting color and must be readable. No cement pellet or liquid style weights. Weights must be securely mounted to the car with the minimum of two 1/2" bolts and nuts per 50 pounds of weight. Loss of any weights may be grounds for disqualification. No weight on rear bumper or outside body of the car. No weight on the rear end housing.

31. WRECKER HOOKS

MANDATORY – FRONT AND REAR. Chains must be used; cables are not acceptable tow hooks. Chain must be a minimum of 1/4". Tow hook cannot extend in front of car. Both must be easily accessible. If there are no wrecker hooks on the car, it will be pushed, towed, or dragged to the infield until after the racing program is completed.

NEITHER WRECKER CREWS NOR RACETRACK PERSONNEL WILL BE RESPONSIBLE FOR ANY DAMAGE DONE TO THE ANY VEHICLE.

32. Claims

Promoter only shock claim - \$100

Promoter only carburetor claim - \$250